



应用领域

工业机器人、航空航天设备、高铁地铁、电力发电、铁路轨道交通、船舶、化学工业、通信系统、工程设备安装、工业自动化设备、机床机械设备、照明设备、电气绝缘保护系统等室内外环境的电线电缆保护。

ZINC ALLOY CONDUIT CONNECTOR SERIES

锌合金软管接头系列

采用锌合金压铸制成，用于连接软管，并达到一定的防护等级和抗拉，外型美观、结构紧密、强度高，安装方法快速、简单、安全。

螺纹选择：M公制螺纹、PG德制螺纹、G英制螺纹、NPT美标螺纹。

材质选择：锌合金镀锌

选型注意事项：常规产品，可根据页面型号进行选型，非标产品请联系我们销售或技术参与选型。

Made of high quality zinc alloy by die casting. It is used for connecting conduit, and to achieve a certain level of IP protection and tension resistance, with nice looking, compact structure and high strength, easy, fast & safe assembly in application.

Thread: Metric, PG, G and NPT thread


Material: Zinc Alloy

Selection precautions: Standard products can be selected according to the page model.

For non-standard products, please contact us




LNE-DPJ 锌合金端式接头 Zinc Alloy Straight Fitting

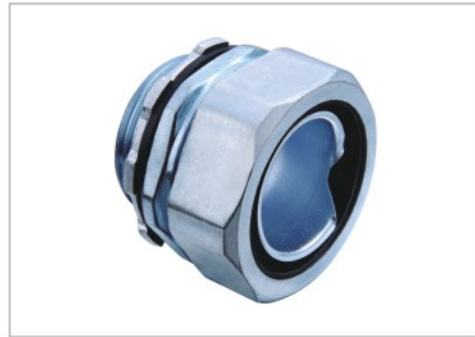


产品材质: A,C,F部位采用优质加厚型锌合金制成, B,E部位采用丁腈橡胶制成, D部位为铁皮制成。
 螺纹规格: 公制(M)
 工作温度: -40°C至+100°C, 短时可达+120°C。
 产品特性: 加厚型锌合金镀锌或镀铬, 外型美观, 结构紧密, 强度高, 软管护套设计与软管相扣接紧之设计, 装配省时便利, 抗拉力强, 可防水, 防尘, 抗盐, 耐酸碱, 酒精, 油, 脂及一般溶剂。
 除以下标准规格外, 可按要求任意变动螺纹大小及标准。

Product material: Location A, C and F are made of high-quality thickened zinc alloy, B, E are made of chemigums and D is made of iron sheet.
Specification of thread: Metric
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property: Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	配套金属软管(公制) Matching metal Hose(M)	配套金属软管(英寸) Matching metal Hose(in.)	螺纹标准(公制) Thread standard(M)	螺纹长度(mm) Thread Length	螺纹外径 (mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	Φ	Φ	M	GL	D1	SW	PCS
LNE-DPJ-6-M14	Φ6	3/16	M14×1.5	7	14	18	100
LNE-DPJ-8-M16	Φ8	5/16	M16×1.5	8	16	22	100
LNE-DPJ-10-M16	Φ10	1/4	M16×1.5	8	16	22	100
LNE-DPJ-13-M16	Φ13	3/8	M16×1.5	8	16	26	100
LNE-DPJ-13-M20	Φ13	3/8	M20×1.5	10	20	26	100
LNE-DPJ-16-M18	Φ16	1/2	M18×1.5	8	18	30	50
LNE-DPJ-16-M20	Φ16	1/2	M20×1.5	10	20	30	50
LNE-DPJ-16-M24	Φ16	1/2	M24×1.5	10	24	30	50
LNE-DPJ-20-M20	Φ20	3/4	M20×1.5	10	20	36	50
LNE-DPJ-20-M25	Φ20	3/4	M25×1.5	12	25	36	50
LNE-DPJ-20-M27	Φ20	3/4	M27×2.0	12	27	36	50
LNE-DPJ-20-M30	Φ20	3/4	M30×2.0	12	30	36	50
LNE-DPJ-25-M25	Φ25	1	M25×1.5	12	25	43	20
LNE-DPJ-25-M32	Φ25	1	M32×1.5	12	32	43	20
LNE-DPJ-25-M33	Φ25	1	M33×2.0	12	33	43	20
LNE-DPJ-25-M36	Φ25	1	M36×2.0	12	36	43	20
LNE-DPJ-32-M40	Φ32	1-1/4	M40×1.5	14	40	53	20
LNE-DPJ-32-M42	Φ32	1-1/4	M42×2.0	14	42	53	20
LNE-DPJ-32-M48	Φ32	1-1/4	M48×2.0	14	48	53	20
LNE-DPJ-38-M40	Φ38	1-1/2	M40×1.5	14	40	60	10
LNE-DPJ-38-M48	Φ38	1-1/2	M48×2.0	14	48	60	10
LNE-DPJ-38-M50	Φ38	1-1/2	M50×1.5	14	50	60	10
LNE-DPJ-51-M50	Φ51	2	M50×1.5	14	50	74	10
LNE-DPJ-51-M60	Φ51	2	M60×2.0	15	60	74	10
LNE-DPJ-51-M63	Φ51	2	M63×1.5	15	63	74	10
LNE-DPJ-64-M76	Φ64	2-1/2	M76×2.0	20	76	90	5
LNE-DPJ-75-M88	Φ75	3	M88×2.0	22	88	103	5
LNE-DPJ-100-M114	Φ100	4	M114×2.0	28	114	134	1
LNE-DPJ-125-M140	Φ125	5	M140×2.0	29	140	150	1
LNE-DPJ-150-M164	Φ150	6	M164×2.0	29	164	180	1

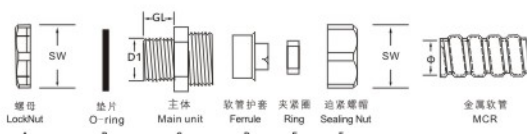

LNE-DPJ 锌合金端式接头 Zinc Alloy Straight Fitting

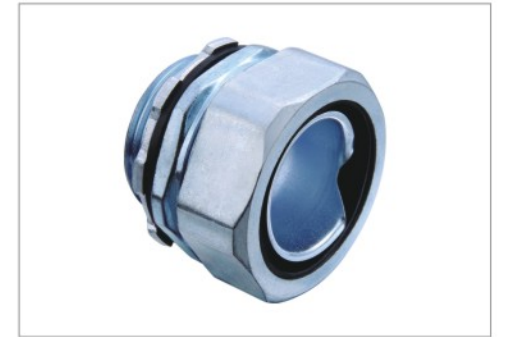


产品材质: A,C,F部位采用优质加厚型锌合金制成, B,E部位采用丁腈橡胶制成, D部位为铁皮制成。
 螺纹规格: 德制(PG)、英制(G)、美制(NPT)
 工作温度: -40°C至+100°C, 短时可达+120°C。
 产品特性: 加厚型锌合金镀锌或镀铬, 外型美观, 结构紧密, 强度高, 软管护套设计与软管相扣接紧之设计, 装配省时便利, 抗拉力强, 可防水, 防尘, 抗盐, 耐酸碱, 酒精, 油, 脂及一般溶剂。
 除以下标准规格外, 可按要求任意变动螺纹大小及标准。

Product material: Location A, C and F are made of high-quality thickened zinc alloy, B, E are made of chemigums and D is made of iron sheet.
Specification of thread: PG, G, NPT
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property: Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	配套金属软管(公制) Matching metal Hose(M)	配套金属软管(英寸) Matching metal Hose(in.)	螺纹标准(德制) Thread standard(PG)	螺纹长度(mm) Thread Length	螺纹外径 (mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	Φ	Φ	PG	GL	D1	SW	PCS
LNE-DPJ-6-PG7	Φ6	3/16	PG7	8	12.5	18	100
LNE-DPJ-8-PG9	Φ8	5/16	PG9	8	15.2	22	100
LNE-DPJ-10-PG9	Φ10	1/4	PG9	8	15.2	22	100
LNE-DPJ-13-PG11	Φ13	3/8	PG11	8	18.6	26	100
LNE-DPJ-13-PG13.5	Φ13	3/8	PG13.5	8	20.4	26	100
LNE-DPJ-16-PG13.5	Φ16	1/2	PG13.5	8	20.4	30	50
LNE-DPJ-16-PG16	Φ16	1/2	PG16	11	22.5	30	50
LNE-DPJ-20-PG21	Φ20	3/4	PG21	14	28.3	36	50
LNE-DPJ-25-PG29	Φ25	1	PG29	15	37	43	20
LNE-DPJ-32-PG29	Φ32	1-1/4	PG29	15	37	53	20
LNE-DPJ-38-PG36	Φ38	1-1/2	PG36	16	47	60	10
LNE-DPJ-38-PG42	Φ38	1-1/2	PG42	16	54	60	10
LNE-DPJ-51-PG48	Φ51	2	PG48	18	59.3	74	10

订货号 (英制) Order No.(G)	螺纹标准(英制) Thread standard(G)	订货号 (美制) Order No.(NPT)	螺纹标准(美制) Thread standard(NPT)	配套金属软管(公制) Matching metal Hose(M)	配套金属软管(英寸) Matching metal Hose(in.)	螺纹长度(mm) Thread Length	螺纹外径 (mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	No.	NPT	Φ	Φ	GL	D1	SW	PCS
LNE-DPJ-6-G1/4	G1/4	LNE-DPJ-6-NPT1/4	NPT1/4	Φ6	3/16	8	13.2	18	100
LNE-DPJ-8-G1/4	G1/4	LNE-DPJ-8-NPT1/4	NPT1/4	Φ8	5/16	8	13.2	22	100
LNE-DPJ-10-G1/4	G1/4	LNE-DPJ-10-NPT1/4	NPT1/4	Φ10	1/4	8	13.2	22	100
LNE-DPJ-13-G3/8	G3/8	LNE-DPJ-13-NPT3/8	NPT3/8	Φ13	3/8	8	16.5	26	50
LNE-DPJ-16-G1/2	G1/2	LNE-DPJ-16-NPT1/2	NPT1/2	Φ16	1/2	11	21.3	30	50
LNE-DPJ-20-G3/4	G3/4	LNE-DPJ-20-NPT3/4	NPT3/4	Φ20	3/4	14	26.6	36	50
LNE-DPJ-25-G1	G1	LNE-DPJ-25-NPT1	NPT1	Φ25	1	15	33.4	43	20
LNE-DPJ-32-G1-1/4	G1-1/4	LNE-DPJ-32-NPT1-1/4	NPT1-1/4	Φ32	1-1/4	15	42.1	53	20
LNE-DPJ-38-G1-1/2	G1-1/2	LNE-DPJ-38-NPT1-1/2	NPT1-1/2	Φ38	1-1/2	16	47.8	60	10
LNE-DPJ-51-G2	G2	LNE-DPJ-51-NPT2	NPT2	Φ51	2	18	59.6	74	10
LNE-DPJ-64-G2-1/2	G2-1/2	LNE-DPJ-64-NPT2-1/2	NPT2-1/2	Φ64	2-1/2	22	75.1	90	5
LNE-DPJ-75-G3	G3	LNE-DPJ-75-NPT3	NPT3	Φ75	3	22	87.8	103	5
LNE-DPJ-100-G4	G4	LNE-DPJ-100-NPT4	NPT4	Φ100	4	24	113	134	1
LNE-DPJ-125-G5	G5	LNE-DPJ-125-NPT5	NPT5	Φ125	5	25	136	160	1
LNE-DPJ-150-G6	G6	LNE-DPJ-150-NPT6	NPT6	Φ150	6	35	160	195	1


LNE-DPN 锌合金内牙式接头 Zinc Alloy Female Thread Straight Fitting

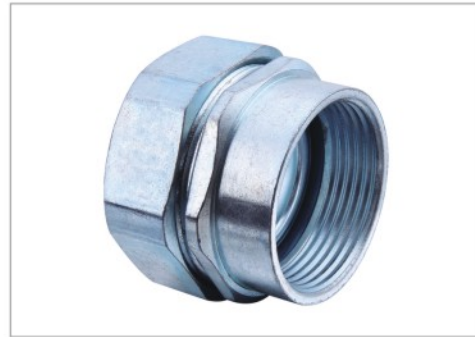

产品材质: C,F部位采用优质加厚型锌合金制成, E部位采用丁腈橡胶制成, D部位为铁皮压铸制成。
螺纹规格: 英制(G)【公制螺纹可定制】
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 内螺纹型用于接带螺纹钢管或配有螺纹的连接件均可。

Product material: Location C and F are made of thickened zinc alloy; E are made of chemigums, and D is of iron casting.
Specification of thread: G(metric thread can be customized).
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property: Female thread type is suitable for connection with threaded steel conduit or external thread connection.

订货号 Order No.	配套金属软管(公制) Matching metal Hose(M)	配套金属软管(英制) Matching metal Hose(G)	螺纹标准(英制) Thread standard(G)	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	Φ	Φ	G	SW	PCS
LNE-DPN-13	Φ 12(13)	3/8"	G3/8"	26	100
LNE-DPN-16	Φ 15 (16)	1/2"	G1/2"	30	50
LNE-DPN-20	Φ 20 (19)	3/4"	G3/4"	36	50
LNE-DPN-25	Φ 25	1"	G1"	43	20
LNE-DPN-32	Φ 32	1 1/4"	G1 1/4"	53	20
LNE-DPN-38	Φ 38 (40)	1 1/2"	G1 1/2"	60	10
LNE-DPN-51	Φ 51 (50)	2"	G2"	74	10
LNE-DPN-64	Φ 64 (70)	2 1/2"	G2 1/2"	90	5
LNE-DPN-75	Φ 75 (80)	3"	G3"	103	5
LNE-DPN-100	Φ 100	4"	G4"	134	1
LNE-DPN-125	Φ 125	5"	G5"	160	1
LNE-DPN-150	Φ 150	6"	G6"	195	1

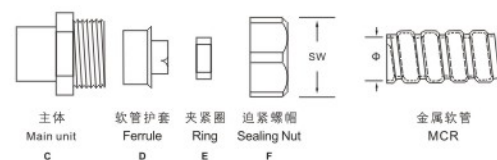


LNE-DKJ 锌合金卡套式接头 Zinc Alloy Sleeve Type Fitting




产品材质: C,F部位采用优质加厚型锌合金制成, E部位采用丁腈橡胶制成, D部位为铁皮压铸制成。
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 1.加厚型锌合金镀锌或镀铬, 外型美观、结构紧密、强度高,
2.软管护套设计与软管相扣接紧之设计, 装配省时便利, 抗拉力强,
3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。
除以下标准规格外, 可按要求任意变动螺纹大小及标准。

Product material: Location C and F are made of high quality thickened zinc alloy; B and E are made of chemigums, and D is made of galvanized iron.
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property:
1. Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength.
2. Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance.
3. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.
Besides the following specifications, the size of pipe fittings can be varied at your discretion as per requirements.

订货号 Order No.	配套金属软管(公制) Matching metal Hose(M)	螺牙厚钢管 Threaded Thick Steel Conduit		薄钢管 Thin Steel Conduit		扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
		公制 M	外径X壁厚 (mm) Outer Diameter x Wall Thickness	公制 M	外径X壁厚 (mm) Outer Diameter x Wall Thickness		
No.	Φ	M	OxW	M	OxW	SW	PCS
LEN-DKJ-10	Φ10	#10		#12	12.76 × 1.60	22	100
LEN-DKJ-12	Φ12(13)	#12	17.00 × 2.25	#15	15.87 × 1.60	26	100
LEN-DKJ-16	Φ15(16)	#15	21.25 × 2.75	#20	19.05 × 1.80	30	50
LEN-DKJ-20	Φ20(19)	#20	26.75 × 2.75	#25	25.40 × 1.80	36	50
LEN-DKJ-25	Φ25	#25	33.50 × 3.25	#32	31.75 × 1.80	43	20
LEN-DKJ-32	Φ32	#32	42.25 × 3.25	#40	38.10 × 1.80	53	20
LEN-DKJ-38	Φ38(40)	#40	48.00 × 3.50	#50	50.80 × 2.00	60	10
LEN-DKJ-51	Φ51(50)	#50	60.00 × 3.50	#70	63.50 × 2.50	74	10
LEN-DKJ-64	Φ64(70)	#70	75.50 × 3.75	#80	76.20 × 3.20	90	5
LEN-DKJ-75	Φ75(80)	#80	88.50 × 4.00			103	5
LEN-DKJ-100	Φ100	#100	114.00 × 4.00			134	1
LEN-DKJ-125	Φ125	#125	140.00 × 4.50			160	1
LEN-DKJ-150	Φ150	#150	165.00 × 4.50			195	1

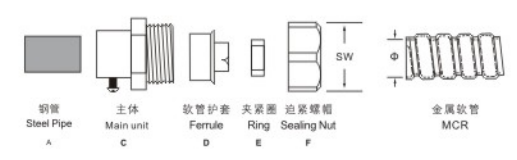


LNE-DGJ 锌合金卡簧自固式接头 Zinc Alloy Circlip Self Secured Fitting

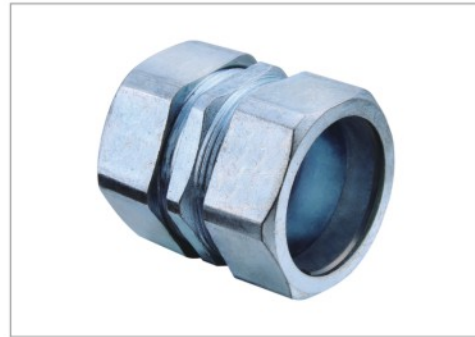

产品材质: B,D,G部位采用优质加厚型锌合金制成, C,F部位采用丁腈橡胶制成, E部位为铁皮压铸制成。
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 1.加厚型锌合金镀锌或镀铬, 外型美观, 结构紧密, 强度高,
2.软管护套设计与软管相扣接紧之设计, 装配省时便利, 抗拉力强,
3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。
除以下标准规格外, 可按要求任意变动螺纹大小及标准。

Product material: Location B,D,G are made of high quality thickened zinc alloy; C,F are made of chemigums ,and is made of iron sheet.
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property:
1. Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength.
2. Ferrule design make conduit connection tightly, easy assembly,and strong pull resistance.
3. Water resistant, dust resistant, inactive with salts, acid and alkali resistance,alcohols,oils and greases as well as general solvent.
Besides the following specifications, the size of pipe fittings can be varied at your discretion as per requirements.

订货号 Order No.	配套金属软管(公制) Matching metal Hose(M)	螺牙厚钢管 Threaded Thick Steel Conduit		薄钢管 Thin Steel Conduit		扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
		公制 M	外径X壁厚 (mm) Outer Diameter x Wall Thickness	公制 M	外径X壁厚 (mm) Outer Diameter x Wall Thickness		
No.	Φ	M	OxW	M	OxW	SW	PCS
LNE-DGJ-10	Φ10	#10		#12	12.76 × 1.60	22	100
LNE-DGJ-12	Φ12(13)	#12	17.00 × 2.25	#15	15.87 × 1.60	26	100
LNE-DGJ-16	Φ15(16)	#15	21.25 × 2.75	#20	19.05 × 1.80	30	50
LNE-DGJ-20	Φ20(19)	#20	26.75 × 2.75	#25	25.40 × 1.80	36	20
LNE-DGJ-25	Φ25	#25	33.50 × 3.25	#32	31.75 × 1.80	43	20
LNE-DGJ-32	Φ32	#32	42.25 × 3.25	#40	38.10 × 1.80	53	10
LNE-DGJ-38	Φ38(40)	#40	48.00 × 3.50	#50	50.80 × 2.00	60	10
LNE-DGJ-51	Φ51(50)	#50	60.00 × 3.50	#70	63.50 × 2.50	74	10
LNE-DGJ-64	Φ64(70)	#70	75.50 × 3.75	#80	76.20 × 3.20	90	5
LNE-DGJ-75	Φ75(80)	#80	88.50 × 4.00			103	5
LNE-DGJ-100	Φ100	#100	114.00 × 4.00			134	1
LNE-DGJ-125	Φ125	#125	140.00 × 4.50			160	1
LNE-DGJ-150	Φ150	#150	165.00 × 4.50			195	1

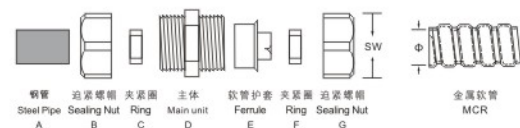


LNE-DWJ 锌合金90度弯接头 Zinc Alloy 90-Degree Angle Elbow Fitting



产品材质: A,C,F部位采用优质加厚型锌合金制成, D部位为铁皮压铸制成。
螺纹规格: 英制(G)
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 接合后和箱体成90度, 加厚型锌合金,外型美观, 结构紧密, 强度高。

Product material: A, C, F parts are made of high quality thickened zinc alloy. D is made of iron casting.
Specification of thread: G
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property:90 degrees after connected with box , thickened zinc alloy, nice looking, compact structure, high strength.

订货号 (英制) Order No.(G)	螺纹标准 (英制) Thread Standard(G)	配套金属软管 (公制) Metal Flexibe Conduit(M)	主体长度(mm) Main Unit Length	螺纹长度(mm) Thead Length	螺纹外径(mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	H	GL	D1	SW	PCS
LNE-DWJ90-13-G3/8	G3/8	Φ13	32	8	16.5	26	50
LNE-DWJ90-16-G1/2	G1/2	Φ16	36	11	21.3	30	50
LNE-DWJ90-20-G3/4	G3/4	Φ20	45	14	26.6	36	50
LNE-DWJ90-25-G1	G1	Φ25	52	15	33.4	43	20
LNE-DWJ90-32-G1-1/4	G1-1/4	Φ32	60	15	42.1	53	20
LNE-DWJ90-38-G1-1/2	G1-1/2	Φ38	68	16	47.8	60	10
LNE-DWJ90-51-G2	G2	Φ51	80	18	59.6	74	10
LNE-DWJ90-64-G2-1/2	G2-1/2	Φ64	110	22	75.1	90	5
LNE-DWJ90-75-G3	G3	Φ75	22	22	87.8	103	5
LNE-DWJ90-100-G4	G4	Φ100	24	24	113	134	1

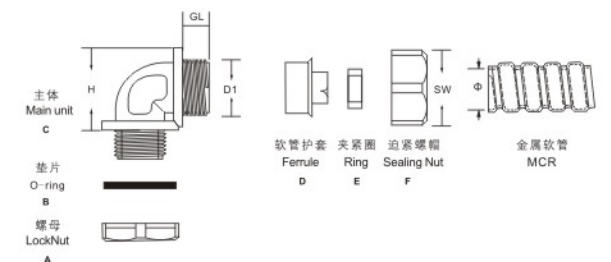


LNE-DWJ 锌合金45度弯接头 Zinc Alloy 45-Degree Angle Elbow Fitting



产品材质: A,C,F部位采用优质加厚型锌合金制成, D部位为铁皮压铸制成。
螺纹规格: 英制(G)
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 接合后和箱体成45度, 加厚型锌合金, 外型美观, 结构紧密, 强度高。

Product material: A, C, F parts are made of high quality thickened zinc alloy. D is made of iron casting.
Specification of thread: G
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property: 45 degrees after connected with box, thickened zinc alloy, nice looking, compact structure, high strength.

订货号 (英制) Order No.(G)	螺纹标准 (英制) Thread Standard(G)	配套金属软管 (公制) Metal Flexibe Conduit(M)	主体长度(mm) Main Unit Length	螺纹长度(mm) Thead Length	螺纹外径(mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	H	GL	D1	SW	PCS
LNE-DWJ45-13-G3/8	G3/8	Φ13	33	8	16.5	26	50
LNE-DWJ45-16-G1/2	G1/2	Φ16	36	11	21.3	30	50
LNE-DWJ45-20-G3/4	G3/4	Φ20	41	14	26.6	36	25
LNE-DWJ45-25-G1	G1	Φ25	52	15	33.4	43	20
LNE-DWJ45-32-G1-1/4	G1-1/4	Φ32	62	15	42.1	53	10
LNE-DWJ45-38-G1-1/2	G1-1/2	Φ38	68	16	47.8	60	10
LNE-DWJ45-51-G2	G2	Φ51	80	18	59.6	74	5
LNE-DWJ45-64-G2-1/2	G2-1/2	Φ64	115	22	75.1	90	5
LNE-DWJ45-75-G3	G3	Φ75		22	87.8	103	1
LNE-DWJ45-100-G4	G4	Φ100		24	113	134	1

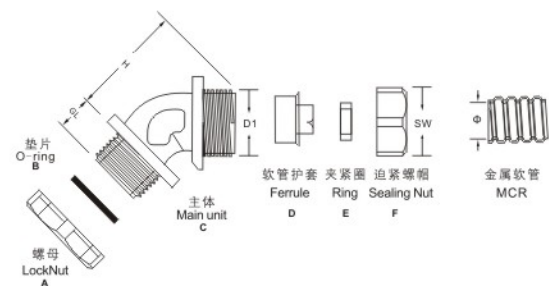

LNE-Y-Z 锌合金Y型三通接头 Zinc Alloy Y-shaped Fitting




产品材质: A,C,F采用优质加厚型锌合金制成, E部位采用丁腈橡胶制成, D部位为铁皮制成。
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 加厚型锌合金镀锌或镀铬, 外型美观, 结构紧密, 强度高, 软管护套设计与软管相扣接紧之设计, 装配省时便利, 抗拉力强, 可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。


Product material: Location A, C, F are made of high-quality thickened zinc alloy, E are made of chemigums, D is made of iron sheet.
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property: Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

订货号 Order No.	配套软管 Matching Conduit
LNE-Y-Z-13/13/13	13/13/13
LNE-Y-Z-13/13/16	13/13/16
LNE-Y-Z-16/16/16	16/16/16
LNE-Y-Z-16/16/13	16/16/13
LNE-Y-Z-20/20/20	20/20/20
LNE-Y-Z-20/13/13	20/13/13
LNE-Y-Z-20/16/13	20/16/13
LNE-Y-Z-20/20/13	20/20/13
LNE-Y-Z-20/20/16	20/20/16
LNE-Y-Z-25/25/25	25/25/25
LNE-Y-Z-25/20/16	25/20/16
LNE-Y-Z-25/20/13	25/20/13

订货号 Order No.	配套软管 Matching Conduit
LNE-Y-Z-25/16/16	25/16/16
LNE-Y-Z-25/20/20	25/20/20
LNE-Y-Z-25/25/13	25/25/13
LNE-Y-Z-25/25/20	25/25/20
LNE-Y-Z-32/32/32	32/32/32
LNE-Y-Z-32/25/13	32/25/13
LNE-Y-Z-32/32/25	32/32/25
LNE-Y-Z-32/25/25	32/25/25
LNE-Y-Z-32/32/20	32/32/20
LNE-Y-Z-32/32/16	32/32/16
LNE-Y-Z-32/32/13	32/32/13

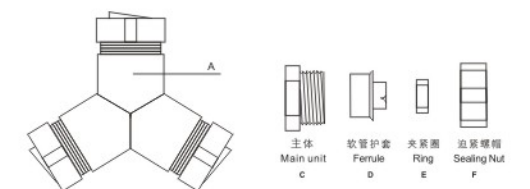


LNE-T-Z 锌合金T型三通接头 Zinc Alloy T-shaped Fitting

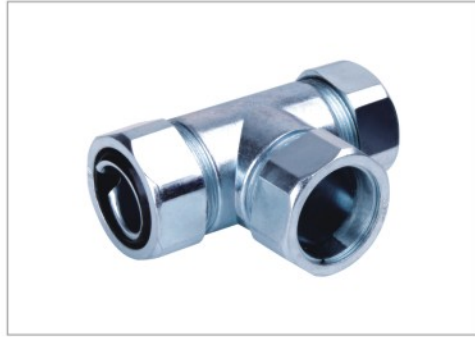

产品材质: A,C,F采用优质加厚型锌合金制成, E部位采用丁腈橡胶制成, D部位为铁皮制成。
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 加厚型锌合金镀锌或镀铬、外型美观、结构紧密、强度高、软管护套设计与软管相扣接紧之设计、装配省时便利, 抗拉力强, 可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Location A,C,F are made of high-quality thickened zinc alloy, E are made of chemigums, D is made of iron sheet.
Temperature: -40°C ~ +100°C, instantaneously can be +120°C.
Property: Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

订货号 Order No.	配套软管 Matching Conduit	包装单位(只/包) Packaging Unit(PCS)
LNE-T-Z-3*16	16/16/16	25
LNE-T-Z-3*20	20/20/20	25
LNE-T-Z-3*25	25/25/25	25

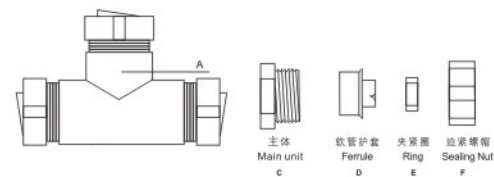


LNE-MBG 金属软管电缆接头 Cable Gland For Metal Flexible Conduit



产品材质: A,C,F,I部位采用优质锌合金镀镍, D部位采用尼龙PA66制成, B,E,H采用丁腈橡胶, G为铁皮压铸制成。
产品规格: 公制(M)
防护等级: IP68
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 1.外型美观、结构紧密、强度更高。
2.软管护套设计与软管相扣接紧之设计、配合近紧头装配省时便利, 抗拉力强。
3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。
除以下标准规格外, 可另按客户要求任意变动大小及螺纹标准。

Product material: A,C,F,I parts are zinc-nickel alloy .D part is PA66, B,E,H parts are NBR,G is made of iron.
Thread Specifications: Metric
Protection classification: IP68
Working temperature: -40°C--+100°C, instantaneously can be 120°C
Property: Nice shape, compact structure, higher intensity; Flexible conduit Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent. Besides the following standard specification, customized size and thread standard are available.

订货号 Order No.	配套金属软管 Matching metal Hose		螺纹标准(公制) Thread standard(M)	电缆外径 (mm) Cable Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench		包装单位(只/包) Packaging Unit
	公制(M)	英寸(in.)				SW1	SW2	
No.	Φ	Φ	M	E1	GL	SW1	SW2	PCS
LNE-MBG-M16x1.5-10	Φ10	1/4"	M16x1.5	4-8	7.0	24	20	50
LNE-MBG-M20x1.5-13	Φ13	3/8"	M20x1.5	8-12	8.0	26	24	50
LNE-MBG-M20x1.5-16	Φ16	1/2"	M20x1.5	8-12	8.0	28	24	50
LNE-MBG-M24x1.5-16	Φ16	1/2"	M24x1.5	10-14	10.0	28	28	50
LNE-MBG-M25x1.5-20	Φ20	3/4"	M25x1.5	11-16	11.0	35	30	25
LNE-MBG-M32x1.5-25	Φ25	1"	M32x1.5	15-22	11.0	42	35	20
LNE-MBG-M40x1.5-32	Φ32	1 1/4"	M40x1.5	22-28	12.0	50	45	10
LNE-MBG-M50x1.5-38	Φ38	1 1/2"	M50x1.5	28-36	13.0	57	55	10
LNE-MBG-M63x1.5-51	Φ51	2"	M63x1.5	37-44	14.0	70	70	5
LNE-MBG-M27x2.0-20	Φ20	3/4"	M27x2.0	13-18	11.0	35	32	25
LNE-MBG-M30x2.0-20	Φ20	3/4"	M30x2.0	14-20	11.0	35	35	25
LNE-MBG-M33x2.0-25	Φ25	1"	M33x2.0	15-22	11.0	42	37	20
LNE-MBG-M36x2.0-25	Φ25	1"	M36x2.0	18-25	11.0	42	40	20
LNE-MBG-M42x2.0-32	Φ32	1 1/4"	M42x2.0	24-30	13.0	50	50	10
LNE-MBG-M48x2.0-38	Φ38	1 1/2"	M48x2.0	25-32	13.0	57	53	10
LNE-MBG-M54x2.0-38	Φ38	1 1/2"	M54x2.0	32-38	14.0	57	57	10
LNE-MBG-M60x2.0-51	Φ51	2"	M60x2.0	37-44	14.0	70	70	5
LNE-MBG-M64x2.0-51	Φ51	2"	M64x2.0	37-44	14.0	70	70	5
LNE-MBG-M72x2.0-64	Φ64	2 1/2"	M72x2.0	42-52	15.0	85	80	5
LNE-MBG-M76x2.0-64	Φ64	2 1/2"	M76x2.0	48-55	17.0	85	85	5

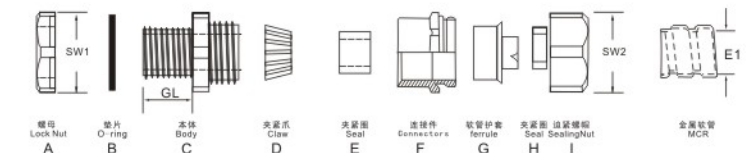

LNE-MBG 金属软管电缆接头 Cable Gland For Metal Flexible Conduit




产品材质: A,C,F,I部位采用优质锌合金电镀, D部位采用尼龙PA66制成, B,E,H采用丁腈橡胶,G为铁皮压铸制成。
产品规格: 德制(PG)、英制(G)、美制(NPT)
防护等级: IP68
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 1.外型美观、结构紧密、强度更高。
2.软管护套设计与软管相扣接紧之设计、配合近紧头装配省时便利, 抗拉力强。
3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。
除以下标准规格外, 可另按客户要求任意变动大小及螺纹标准。

Product material: A,C,F,I parts are zinc-nickel alloy .D part is PA66, B,E,H parts are NBR,G is made of iron.
Thread Specifications: PG,G,NPT
Protection classification: IP68
Working temperature: -40°C~+100°C, instantaneously can be 120°C
Property: Nice shape, compact structure, higher intensity; Flexible conduit Ferrule design make conduit connection tightly, easy assembly ,and strong pull resistance.Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.
Besides the following standard specification, customized size and thread standard are available.

订货号 Order No.	配套金属软管 Matching metal Hose		螺纹标准(德制) Thread standard(PG)	电缆外径 (mm) Cable Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench		包装单位(只/包) Packaging Unit
	公制(M)	英寸(in.)				SW1	SW2	
No.	Φ	Φ	PG	E1	GL	SW1	SW2	PCS
LNE-MBG-PG13.5	Φ16	1/2"	PG13.5	8-12	8.0	28	26	50
LNE-MBG-PG16	Φ16	1/2"	PG16	10-14	10.0	28	28	50
LNE-MBG-PG21	Φ20	3/4"	PG21	13-18	11.0	35	32	25
LNE-MBG-PG29	Φ25	1"	PG29	18-25	11.0	42	42	20
LNE-MBG-PG36	Φ32	1 1/4"	PG36	25-32	12.0	50	42	10
LNE-MBG-PG42	Φ38	1 1/2"	PG42	32-38	13.0	57	55	10
LNE-MBG-PG48	Φ51	2"	PG48	37-44	14.0	70	70	5

订货号 Order No.	配套金属软管 Matching metal Hose		螺纹标准(英制) Thread standard(G)	电缆外径 (mm) Cable Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench		包装单位(只/包) Packaging Unit
	公制(M)	英寸(in.)				SW1	SW2	
No.	Φ	Φ	G	E1	GL	SW1	SW2	PCS
LNE-MBG-G1/2	Φ16	1/2"	G1/2"	8-12	8.0	28	40	50
LNE-MBG-G3/4	Φ20	3/4"	G3/4"	13-18	11.0	35	30	25
LNE-MBG-G1	Φ25	1"	G1"	15-22	11.0	42	35	20
LNE-MBG-G1 1/4	Φ32	1 1/4"	G1 1/4"	22-30	12.0	50	50	10
LNE-MBG-G1 1/2	Φ38	1 1/2"	G1 1/2"	25-32	13.0	57	55	10
LNE-MBG-G2	Φ51	2"	G2"	37-44	14.0	70	70	5

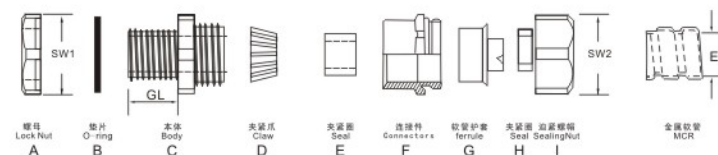

LNE-MSD 塑料软管电缆接头 Cable Gland For Plastic Flexible Conduit



产品材质: A,C,F,H部位采用优质锌合金电镀, B,E,G部位采用丁腈橡胶制成, D部分采用尼龙PA66制成。
螺纹规格: 公制(M)、德制(PG)、英制(G)及美制(NPT)。
防护等级: IP68
产品颜色: A,C,F,H部位为金属色, B,E,G为黑色, D为白色。
工作温度: -40°C至+100°C, 短时可达+120°C。
产品特性: 塑料软管接头配套锁式电缆接头为一体, 防电线松动, 装卸只需拔插无需工具, 大大缩减了安装时间, 夹紧电缆范围大, 抗拉力特强, 产品有耐酸碱、耐化学物质与一般溶剂等抗腐蚀性特性, 可防水、防尘, 全方位的尺寸可广泛应用于各个领域的出线孔上。
除以下标准规格外, 可按客户要求任意变动螺纹大小及标准。

Product material: A,C,F,H parts are zinc-nickel alloy .B, E and G are Chemigum material,Part D is UL approved Nylon Pa66
Thread Specifications: Metric,PG,G,NPT
Protection classification: IP68
Color: A,C,F,H parts are metallic,B,E,G are black, D is white.
Working temperature: -40°C ~ +100°C, instantaneously can be 120°C.
Property: Cable Glands plus conduit connector as whole one,anti-loose for cable, Assembly and discharging work easy by just plugging without tools, greatly reducing the installation time.it can fit with wide range of fastening cable, feature with high tensile strength,acid and alkali resistant, corrosion resistant to generally chemicals and solvents, waterproof, dustproof, widely applied with various types of outlet hole.
Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	螺纹标准(公制) Thread standard(M)	电缆外径(mm) Cable Diameter	适配软管 Suitable Flexible Conduit	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit	
						GL	SW
No.	M	Φ	AD	GL <td>SW</td> <td>PCS</td> <td>PCS</td>	SW	PCS	PCS
LNE-MSD-M12-10.0	M12x1.5	3-6.5	AD10.0	6.0	16.0	50	50
LNE-MSD-M16-13.0	M16x1.5	4-8	AD13.0	7.0	18.0	50	50
LNE-MSD-M16-15.8	M16x1.5	4-8	AD15.8	7.0	18.0	50	50
LNE-MSD-M18-15.8	M18x1.5	6-10	AD15.8	8.0	20.0	50	50
LNE-MSD-M20-15.8	M20x1.5	8-12	AD15.8	8.0	22.0	50	50
LNE-MSD-M20-18.5	M20x1.5	8-12	AD18.5	8.0	22.0	50	50
LNE-MSD-M20-21.2	M20x1.5	8-12	AD21.2	8.0	22.0	25	25
LNE-MSD-M25-21.2	M25x1.5	10-14	AD21.2	10.0	28.0	25	25
LNE-MSD-M25-28.5	M25x1.5	10-14	AD28.5	10.0	28.0	25	25
LNE-MSD-M27-28.5	M27x1.5	13-18	AD28.5	11.0	30.0	25	25
LNE-MSD-M32-34.5	M32x1.5	15-22	AD34.5	11.0	36.0	20	20
LNE-MSD-M40-34.5	M40x1.5	18-25	AD34.5	12.0	45.0	20	20
LNE-MSD-M40-42.5	M40x1.5	18-25	AD42.5	12.0	45.0	10	10
LNE-MSD-M50-54.5	M50x1.5	26-32	AD54.5	13.0	56.0	5	5
LNE-MSD-M63-54.5	M63x1.5	37-44	AD54.5	14.0	70.0	5	5

